

Karndean
COMMERCIAL

Art Select

RIGID CORE
GLUEDOWN

Art Select

ELEVATING DESIGN
TO AN ARTFORM



ART SELECT

ELEVATING DESIGN TO AN ARTFORM

Our Art Select collection sets the standard for premium LVT. Elevating LVT design to an artform, we combine cutting-edge technology and hands-on craftsmanship to replicate wood and stone in striking detail. The Art Select collection includes more than 45 wood- and stone-inspired designs in a broad spectrum of color tones – all with a top-of-the-line 30mil wear layer, and all available in gluedown and rigid core for installation.



Stylish, realistic designs

Each and every one is an original, meticulously crafted by our design team to capture the distinctive grains, textures and markings of hand-selected wood and stone.



Waterproof and easy to clean

Our LVT is impervious to water – it won't swell, warp or crack when wet. It's easy to clean, too, with a broom and mop or by machine.



Exceptional durability

With a 30 mil wear layer and K-Guard+® surface protection, Art Select is backed by a 20-year warranty.



Quieter environments

Art Select in rigid core has a backing that reduces noise to lower floors by 25 dB.



Installation options

Art Select is available in gluedown and rigid core, providing options based on your project needs.



Safe and hygienic

LVT does not promote bacterial growth or harbor dust, and the materials used in our flooring are tested for safety.

KEY SECTORS

For a high-end look, Art Select is unsurpassed. Working with beautiful natural materials curated from around the world, our designers combine artistry and attention to detail to craft flooring virtually indistinguishable from hardwood and stone – all with the durability of a 30mil wear layer.

Hospitality

Impress with high-end style as part of an elevated brand experience.

- Boutique hotels
- High-end bars and restaurants
- Luxury resorts

Healthcare

Inspire confidence and a sense of calm with a beautifully designed space.

- Hospital showcase areas
- Spas and wellness
- Standalone offices (doctor, dentist, specialists)

Senior Living

Create a superior resident experience and impress guests.





- Entrances
- Community spaces
- Residences






Senior Living | ■ Basque Oak RL26 | Serrano Oak RL28 | Calacatta d'Oro LM33

Art Select Wood Designs

Gluedown: 28.0" x 4.50" (711.2mm x 114.3mm) | Rigid Core*: 28.0" x 4.25" (711.2mm x 107.95mm)

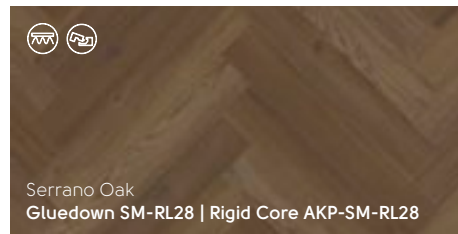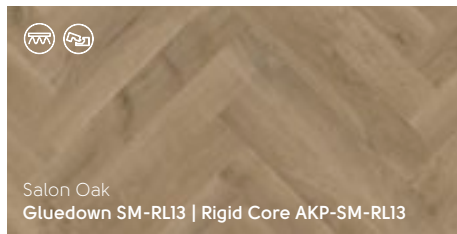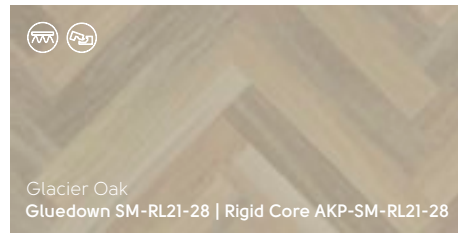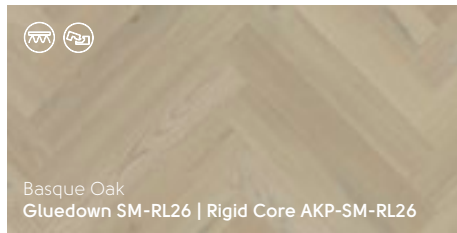

Gluedown: 36.0" x 6.0" (914.4mm x 152.4mm) | Rigid Core: 36.0" x 5.91" (914.4mm x 150.0mm)

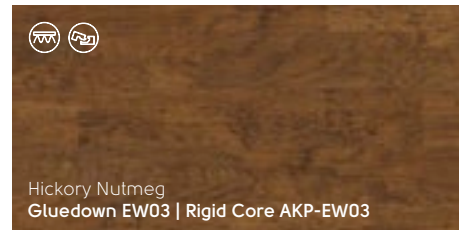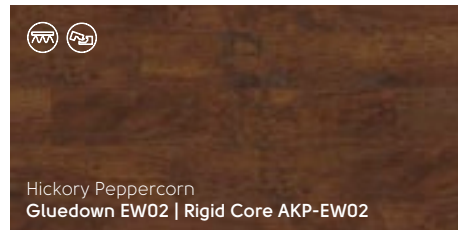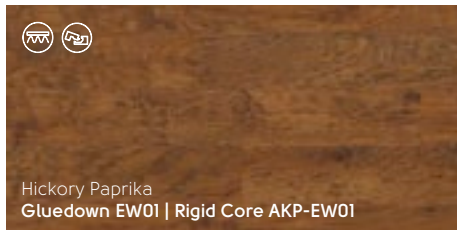

Hickory Nutmeg EW03 | AKP-EW03

*These skus can only be laid in a herringbone pattern.










Available in gluedown and rigid core installation formats.



Belmont Hickory RL45 in a stylish installation, with planks cut to form a custom-designed lay pattern.

Gluedown: 48.0" x 4.50" (1219.2mm x 114.3mm) | Rigid Core: 48.0" x 4.25" (1219.2mm x 107.95mm)

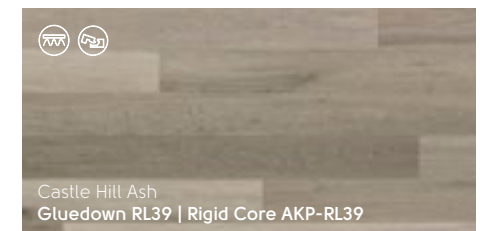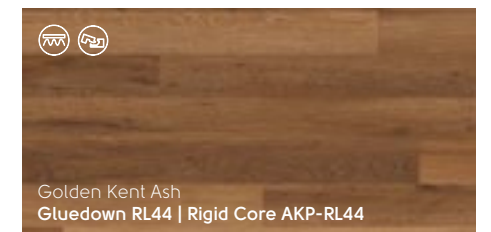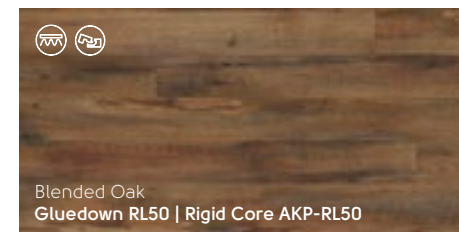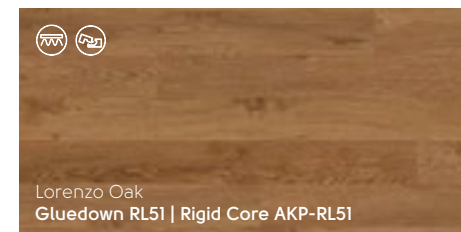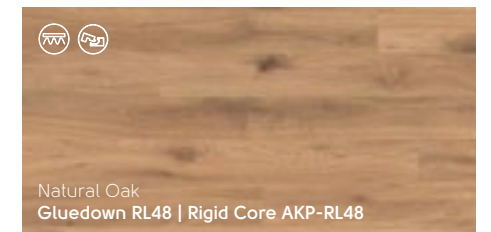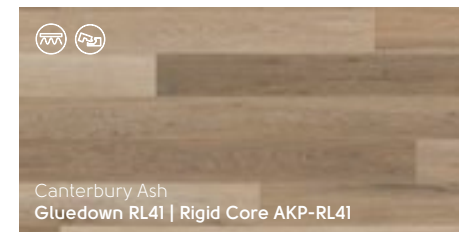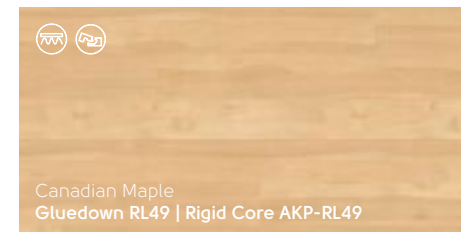

Art Select Wood Designs



Available in glue-down and rigid core installation formats.












Salon Oak **RL13** | **AKP-RL13**










Glacier Oak **RL21** with DS10 10mm design strips

Gluedown: 48.0" x 7.0" (1219.2mm x 177.8mm) | Rigid Core: 48.03" x 7.05" (1220.0mm x 179.0mm)

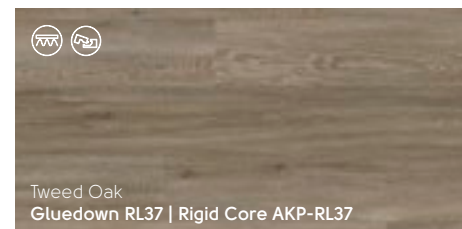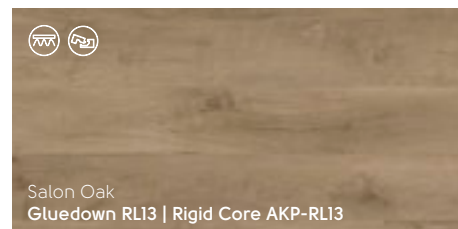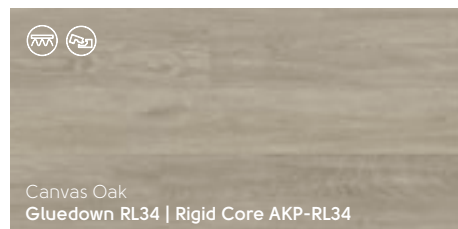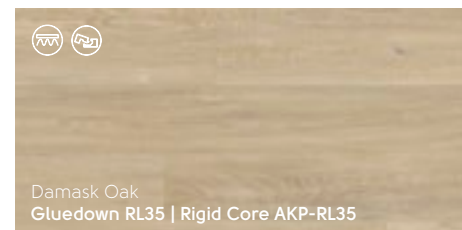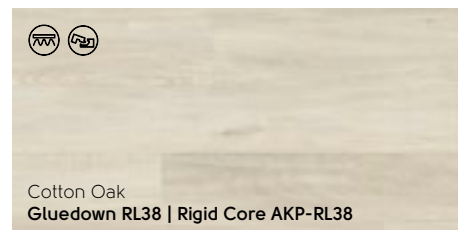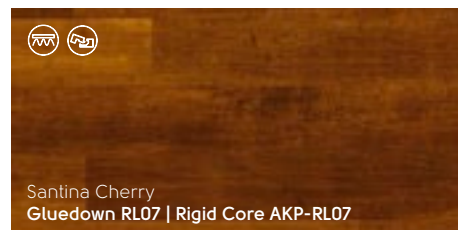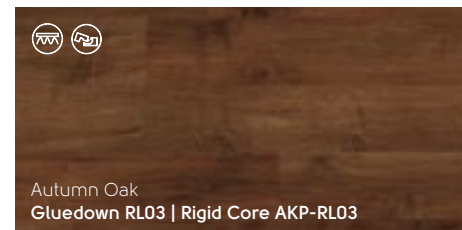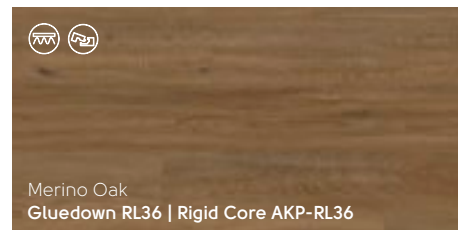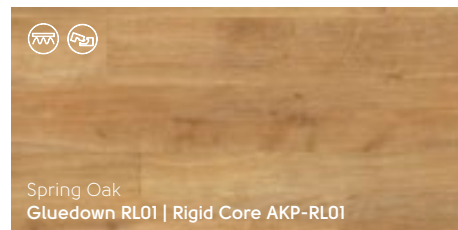

Gluedown: 56.0" x 9.0" (1422.4mm x 228.6mm) | Rigid Core: 55.91" x 8.86" (1420.0mm x 225.0mm)

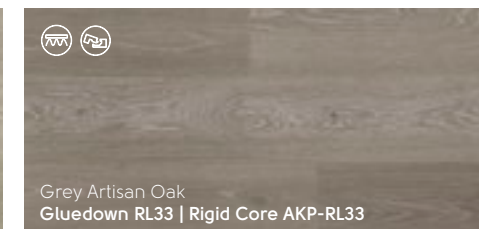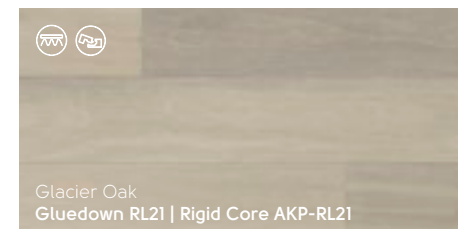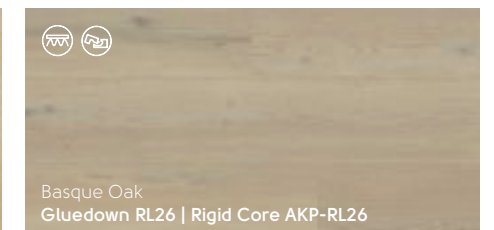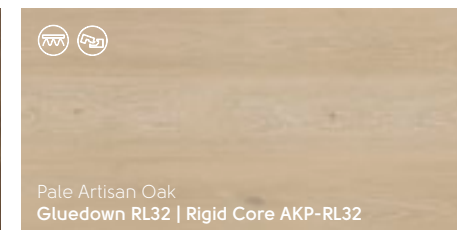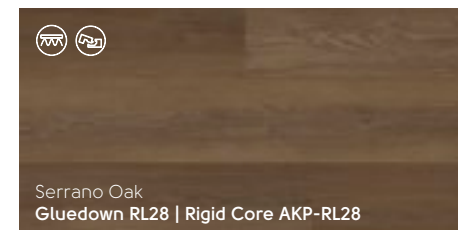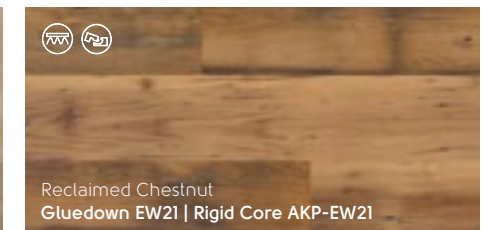
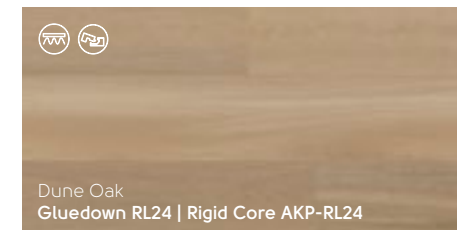


Art Select Stone Designs



■ Sterling Quartzite LM51 | AKT-LM51

Gluedown: 18.0" x 24.0" (457.2mm x 609.6mm) | Rigid Core: 17.99" x 23.62" (457.0mm x 600.0mm)

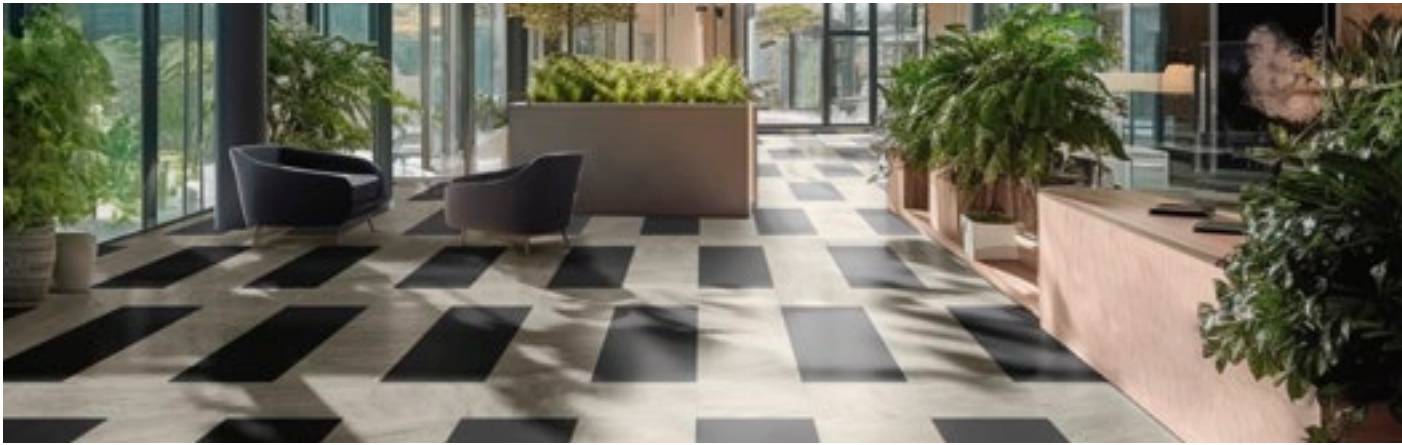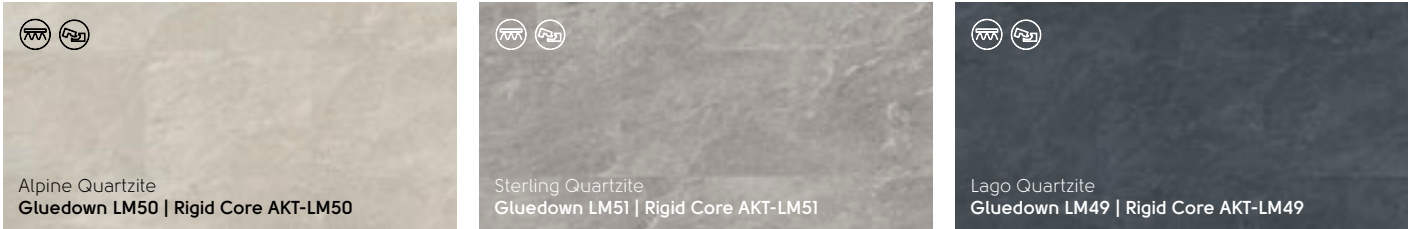

■ Ionic Marble LM30 | AKT-LM30 & Corinthian Marble LM31 | AKT-LM31

Gluedown: 18.0" x 18.0" (457.2mm x 457.2mm) | Rigid Core: 18.0" x 18.0" (457.2mm x 457.2mm)




Available in gluedown and rigid core installation formats.



■ Pearl Onyx LM35, Rose Onyx LM36 & Dove Artisan Oak RL30

Gluedown: 18.0" x 36.0" (457.2mm x 914.4mm) | Rigid Core 18" x 36" (457.2mm x 914.4mm)

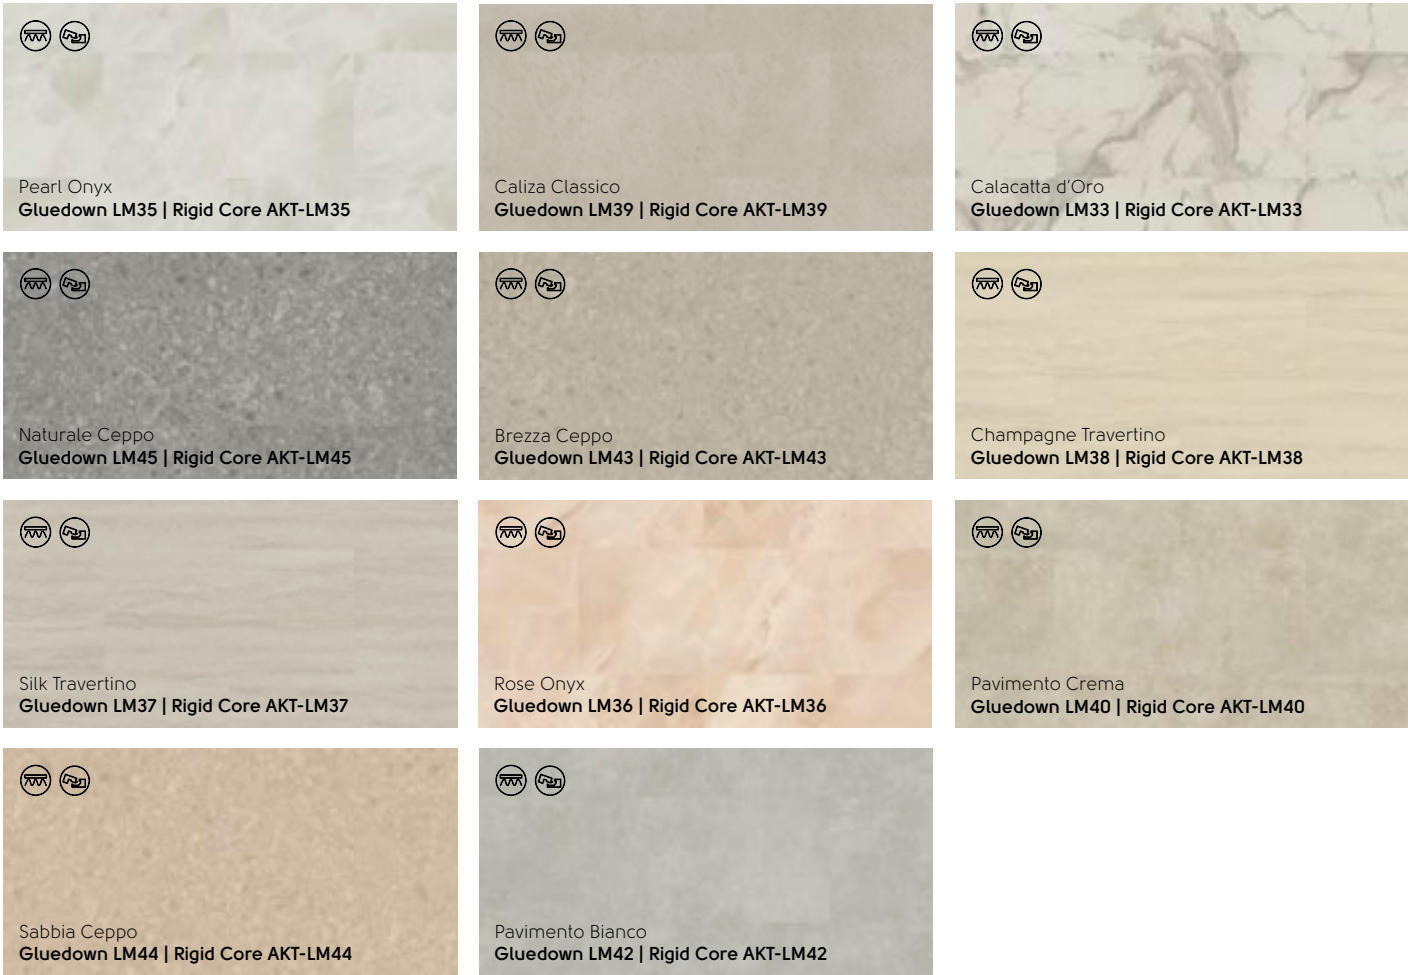


Art Select Technical Information



■ Hickory Nutmeg EW03 | AKP-EW03

Gluedown		Rigid Core	
36.0" x 6.0" 56.0" x 9.0" 48.0" x 7.0" 48.0" x 4.50" 28.0" x 4.50"	Plank Size	36.0" x 5.91" 55.91" x 8.86" 48.03" x 7.05" 48.0" x 4.25" 28.0" x 4.25"	
18.0" x 18.0" 18.0" x 36.0" 18.0" x 24.0"	Tile Size	18.0" x 18.0" 18.0" x 36.0" 17.99" x 23.62"	
30mil	Wear Layer	30mil	
3mm	Thickness	7mm	
Lifetime	Residential Warranty	Lifetime	
15 years	Commercial Warranty	15 years	
Begins with EW RL SM-RL LM	Product Code	Begins with AKP- AKT-	

	Standard	Gluedown	Rigid Core
Size	ASTM F2421	See Index N/A	N/A See Index
Locking system¹		N/A	5G® Fold Down installation system ² 
Thickness	ASTM F386 ASTM F387	3.0 mm N/A	N/A 7.0 mm
Wear layer	ASTM F410	30 mil ³ (0.7 mm) N/A	N/A 30 mil ³ (0.7 mm)
Surface treatment	ASTM F410	K-Guard+® PU coating N/A	N/A K-Guard+® PU coating
Warranty⁴	Commercial Residential	20 years Lifetime	20 years Lifetime
Beveled edge		Standard	Standard
Classification		ASTM I700: Class III Type B	ASTM F3261: Resilient flooring with Rigid Polymeric Core
Reaction to fire	ASTM E648-06	Class 1	Class 1
Smoke density	ASTM E662-06	Pass (<450)	N/A
Flammability test	ASTM D2859	Pass	Pass
Slip resistance⁵	ASTM D2047	Pass (Dry 0.80)	Pass (Dry > 0.8)
Staining resistance	ASTM F925	Pass	Pass
Heat fastness	ASTM F1514	N/A	Pass
Light fastness	ASTM F1515	Pass	Pass
Electrostatic propensity	AATCC 134-1996	N/A	1.7 kv
Abrasion resistance	ASTM D4060	Pass (>50,000 Cycles)	Pass (>50,000 Cycles)
Dimensional stability	ASTM F2199	Pass	N/A
Acoustic impact noise reduction	ASTM E2179 ASTM E492	ΔIIC = 9 dB IIC = 46 dB (6" Concrete Slab w/Drop Ceiling) IIC = 71 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)	ΔIIC =25 dB IIC = 68 dB (6" Concrete Slab w/Drop Ceiling) IIC = 72 dB (6" Concrete Slab w/Drop Ceiling + QuietChoice)
Static load	ASTM F970	Pass (1800 psi at 0.005")	Pass (400 psi at 0.005")
Indentation - residual	ASTM F1914	Pass	Pass
Thickness swell	NALFA 3.2	N/A	Pass (Class 4)
Flexibility	ASTM F137	Pass	N/A
Adhesive		DrySet K-Spray Karndean Epoxy K99 HM	None required; please install according to our installation instructions.
Environmental	FloorScore® SCS-EC10.3-2014 v4.0 Environmental Product Declaration NSF / ANSI 332 ISO 14001 / ISO 9001 ASSURE CERTIFIED™	Indoor air quality certified; Compliant low emitting VOC emissions. External third-party verified Type III EPD Sustainability Assessment for Resilient Floor Coverings; Conformant product Manufactured to quality and environment management systems standards N/A	Indoor air quality certified; Compliant low emitting VOC emissions. External third-party verified Type III EPD Sustainability Assessment for Resilient Floor Coverings; Silver certified product Manufactured to quality and environment management systems standards Conformance with Rigid Core Flooring Standard SCS-0011 V1-0
Recycling		Suitable	Suitable
Phthalate free	CPSC-C1001-09.3	Yes	Yes

¹ 5G® is a patented technology invented by Välinge Innovation AB. The 5G® word mark and logo are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.


² 5G® along short edge; 2G™ long edge
³ Nominal.


⁴ Subject to terms. Please see our website.


⁵ Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors, including but not limited to; product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.




VISIT US ONLINE AT
www.karndeancommercial.com

 Connect with us on LinkedIn **Karndean Designflooring USA**

 Like us on Facebook **karndeandesignflooringUSA**

 For trends and inspiration, **@karndean_USA** on Instagram

 Follow our boards on Pinterest **karndeanUSA**

ASC24 Art Select Dedicated Brochure

Front Cover image: Dune Oak RL24, Calacatta d'Oro LM33 & Pavimento Bianco LM42

Color & Pattern Reproduction

Because of the printing process, photography may not represent our products with exact precision. In addition, the wood and stone materials replicated in our flooring designs feature unique variation that may not always be captured in a single image. We strongly recommend seeing product samples before placing an order.

To order free samples, go to the page of the product you like at karndean.com and click the "Order Sample" box.

Karndean Designflooring owns all their designs and are protected by copyright.